


SOUTHCO PERFORMANCE GUIDELINES
 THE PERFORMANCE GUIDELINES SHOWN ON THIS PAGE ARE SUPPLIED AS A GENERAL GUIDE ONLY, AS CONDITIONS VARY WITH EACH APPLICATION AND METHOD OF INSTALLATION. STRENGTH DATA GIVEN IS FOR FAILURE OF THE PRODUCT OR FOR SUFFICIENT DEFORMATION TO MAKE PRODUCT INOPERABLE. NO SAFETY FACTOR HAS BEEN APPLIED IT IS RECOMMENDED THAT THE USER REQUEST A PRODUCT SAMPLE FOR TESTING TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE PURPOSE INTENDED AND USER'S PARTICULAR APPLICATION.

REV	DATE	09APR2002	DRAWN/CHKD	GDM	DESCRIPTION	UPDATE FORMAT	DATE	8-14-90	DRAWN	RMP	CHKD	SCALE	DRAWING NUMBER	TD-B8-03-J
	A													


B8 GRAB HANDLE




A PAPER SIZE

PART NUMBER
 B8-43 (Front Mounting)
 B8-45 (Rear Mounting)


NOTE: mounting screw tightening torque not to exceed 35 in-lbs (3.9 N-m).



MAXIMUM WORKING LOAD : 125 LBS (556 N)
 AVERAGE ULTIMATE LOAD : 250 LBS (1112 N)

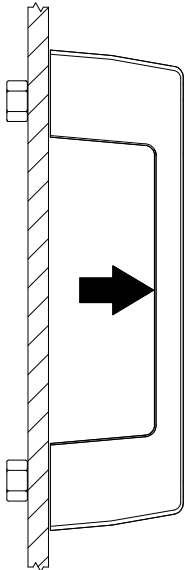

MAXIMUM WORKING LOAD : 125 LBS (556 N)
 AVERAGE ULTIMATE LOAD : 190 LBS (845 N)

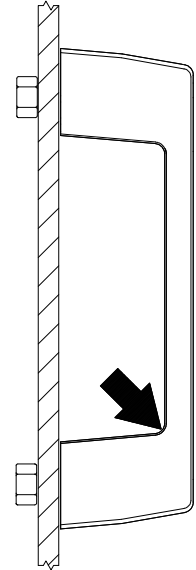

MAXIMUM WORKING LOAD : 200 LBS (888 N)
 AVERAGE ULTIMATE LOAD : 550 LBS (2445 N)

Maximum Working Load is the maximum load that the product will withstand without affecting the operation or appearance of the product.

Average Ultimate Load causes failure of the product or sufficient deformation to make the product inoperable.



PROPRIETARY ITEM - EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY SOUTHCO, INC.