

**southco**PROPRIETARY ITEM - EXCEPT FOR USES EXPRESSLY  
GRANTED IN WRITING INFORMATION DISCLOSED  
HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT  
AND OTHERWISE ARE RESERVED BY SOUTHCO, INC.

## V7 DRAW LATCH


DATE	DRAWN	CHKD	SCALE	DRAWING NUMBER
10AUG2004	RC	LJ	0.5:1	TD-V7-1-J

REV	DATE	DRAWN/CHKD	DESCRIPTION										
A	17MAY2007	DJK/RLR	PRN: P2007-0652										

A4  
PAPER  
SIZE

## SOUTHCO PERFORMANCE GUIDELINES

THE PERFORMANCE GUIDELINES SHOWN ON THIS PAGE ARE SUPPLIED AS A GENAL GUIDE ONLY, AS CONDITIONS VARY WITH EACH APPLICATION AND METHOD OF INSTRUCTION. STRENGTH DATA GIVEN IS FOR FAILURE OF THE PRODUCT OR FOR SUFFICIENT DEFORMATION TO MAKE PRODUCT INOPERABLE. NO SAFETY FACTOR HAS BEEN APPLIED IT IS RECOMMENDED THAT THE USER REQUEST A PRODUCT SAMPLE FOR TESTING TO DETERMINE THE SUIALITY OF THE PRODUCT FOR THE PURPOSE INTENDED AND USER'S PARTICULAR APPLICATION.

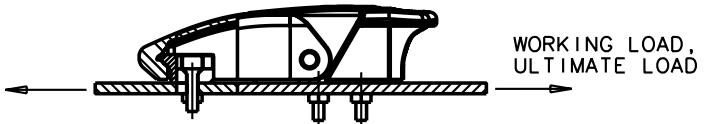

X=0, OR 1  
Y=10, 20, 24 OR 50

PART NUMBER	MAXIMUM RECOMENDED WORKING LOAD ①	AVERAGE ULTIMATE LOAD ②
V7-20-1X1-Y0	1200 N (270 LBS)	2183 N (491 LBS) ③

③ : KEEPER SCREWS BROKEN

- ① : WORKING LOAD IS THE MAXIMUM FORCE THAT THE PRODUCT WILL WITHSTAND WITHOUT AFFECTING THE OPERATION OR APPEARANCE OF THE PRODUCT.
- ② : AVERAGE ULTIMATE LOAD CAUSES FAILURE OF THE PRODUCT OR SUFFICIENT DEFORMATION TO MAKE THE PRODUCT INOPERABLE.